

AROMA SENSE SPASYS SHOWER SYSTEM

Korea New Tech Corp.



2021. 06



Aroma Sense SPASYS Shower System

Enjoy Aroma Vitamin C SPA System at home!



SPASYS

Features



Aroma therapy

The gentle aroma scent from the aroma oil, gives you a more enjoyable shower time.



Anti bacteria Ceramic ball filter

The antibacterial ceramic ball inside the shower head prevents bacteria from multiplying.



Removal of residual chlorine

The aroma vitamin C filter removes 98% of residual chlorine in tap water so that you can use clean water to shower your skin and hair.



Silk therapy shower

The AS-Mist shower head generate very soft and silk feeling shower water.



Vitamin C Water

Vitamin C enhanced shower water keeps your skin smooth and hair well nourished.



Moisturizing

The moisturizing filter with jojoba oil makes skin and hair well moisturized.



Removal of Rust & Pollutants

The sediment filter removes rust, pollutant, bad odors from water.



Mist spray

The AS-Mist shower head generates a fine mist water spray during shower.



Negative ions shower


The patented, triangular water spray plate hole technology makes the shower head release a lot of negative ion.

AROMA SENSE SPASYS SHOWER SYSTEM

2 composite filter : 5th filtration system



1st filter : SPASYS CARBON FILTER

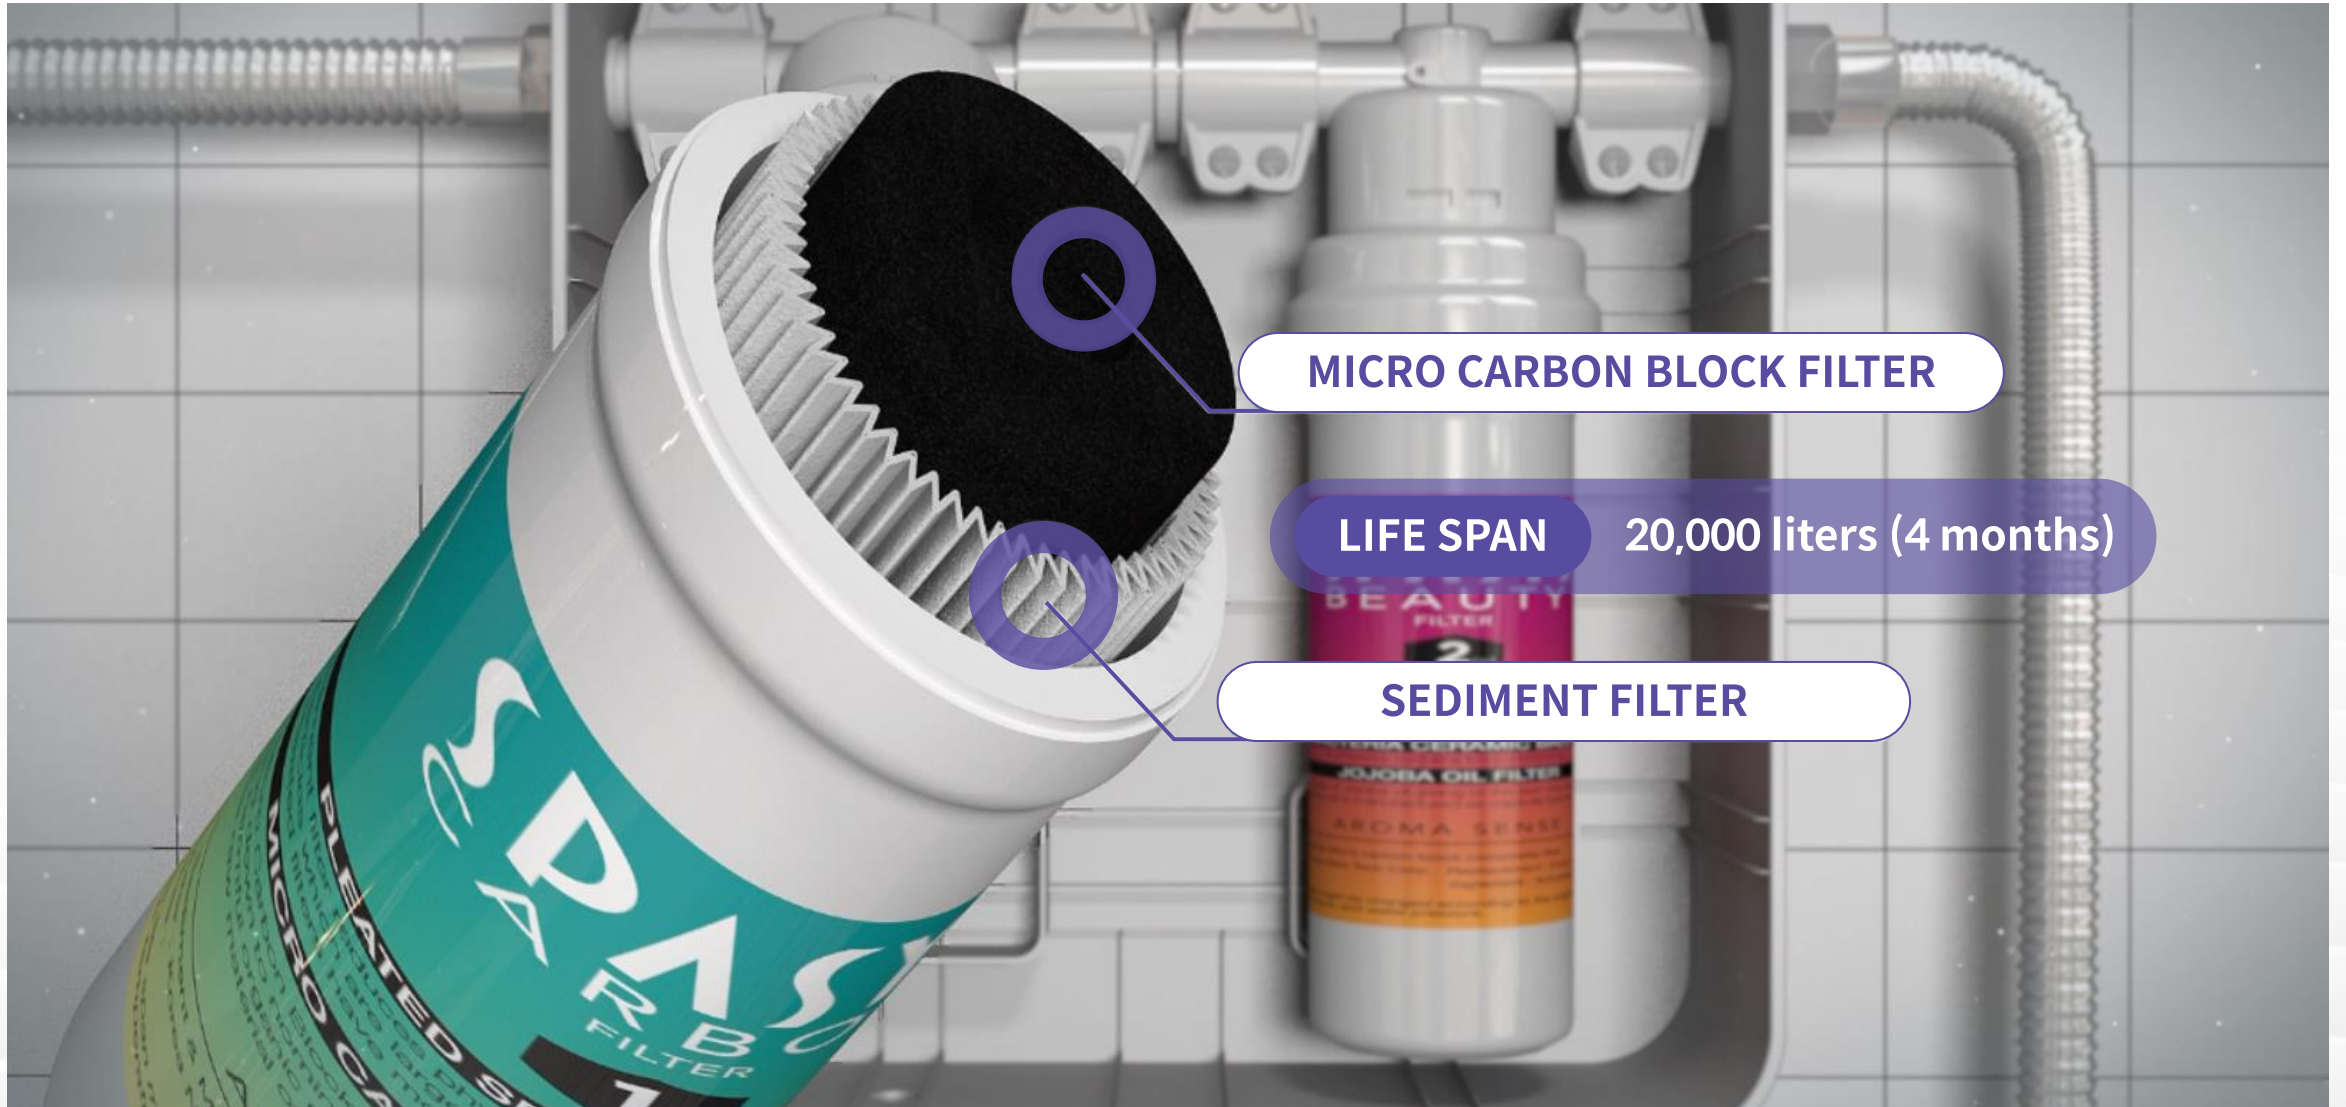

SPASYS CARBON FILTER : SEDIMENT FILTER



SEDIMENT FILTER

The sediment filter reduces physical particles such as sediment, rust, dirt, scale particles which are larger than 10 micron in size from source water.

1st Filter




SPASYS CARBON FILTER : CARBON BLOCK FILTER




CARBON BLOCK FILTER

The carbon block filter removes sediment particles such as dirt and sand down to nominal 10 micron in size from source water, and absorbs some harmful organic chemicals such as chlorine, bad taste and odor, and heavy metal. It is made of Activated carbon powder by **Kutamura Japan** and the raw material of this filter is natural coconut from Philippines.

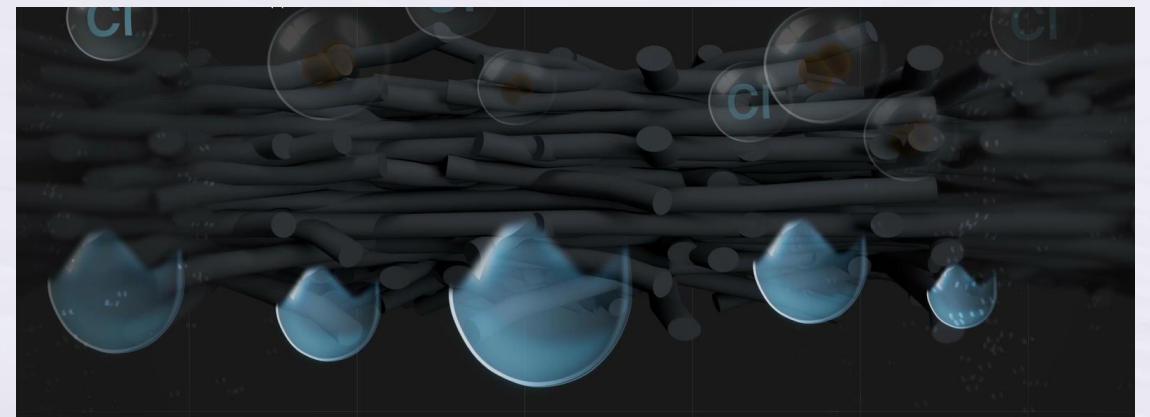

AUTO RELIEF VALVE

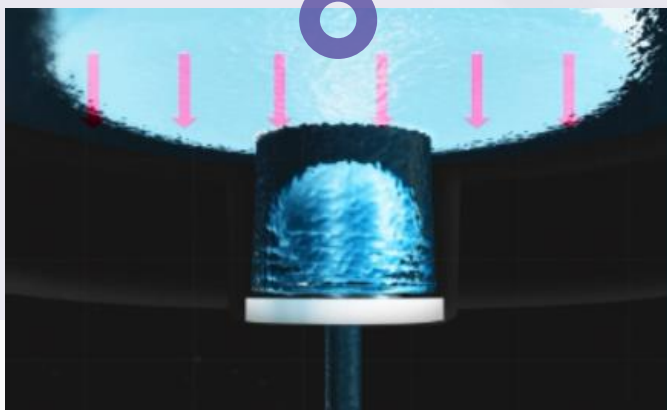

AUTO RELIEF VALVE


If the internal water pressure of the primary filter reaches 7kgs/cm² or more, the auto relief valve at the bottom of the primary filter can open automatically to reduce the internal water pressure.

In this case, the internal water pressure has increased due to the blockage of the primary filter.

AROMA SENSE SPASYS SHOWER SYSTEM

2nd filter : SPASYS BEAUTY FILTER

2nd Filter

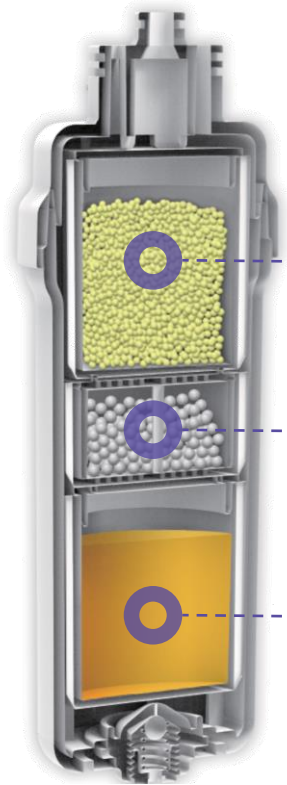

- 3 Moisturizing Filter
(Jojoba oil)
- 4 Anti bacteria
Ceramic ball Filter
- 5 Aroma Vitamin C Filter




SPASYS BEAUTY FILTER : Aroma Vitamin C filter



Aroma Vitamin C filter

It is made of aroma oil and vitamin C.
Aroma oils provide refreshing scent which enhances relaxation and rejuvenation.
Vitamin C helps to remove residual chlorine from tap water and promote healthier hair and skin.


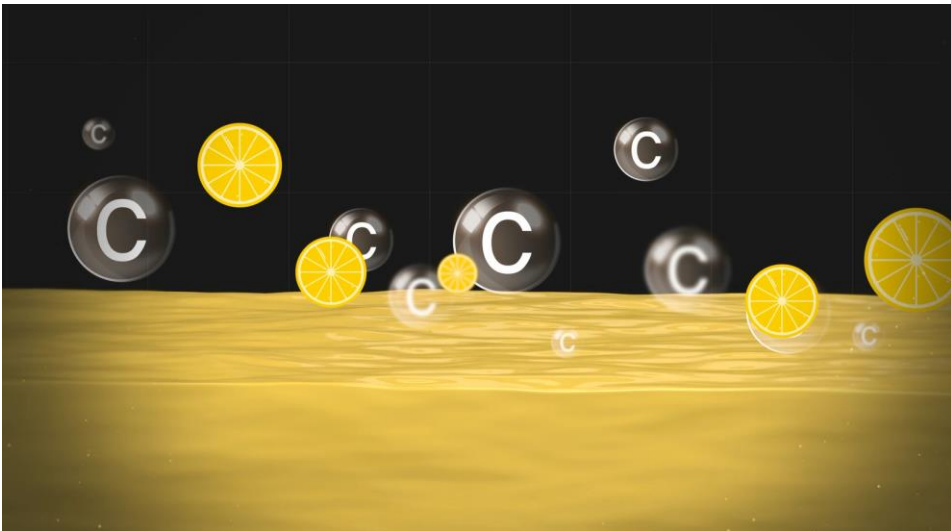


SPASYS BEAUTY FILTER : Anti-bacteria ceramic ball filter



Anti-bacteria ceramic ball filter

It helps prevent the growth of harmful bacteria.

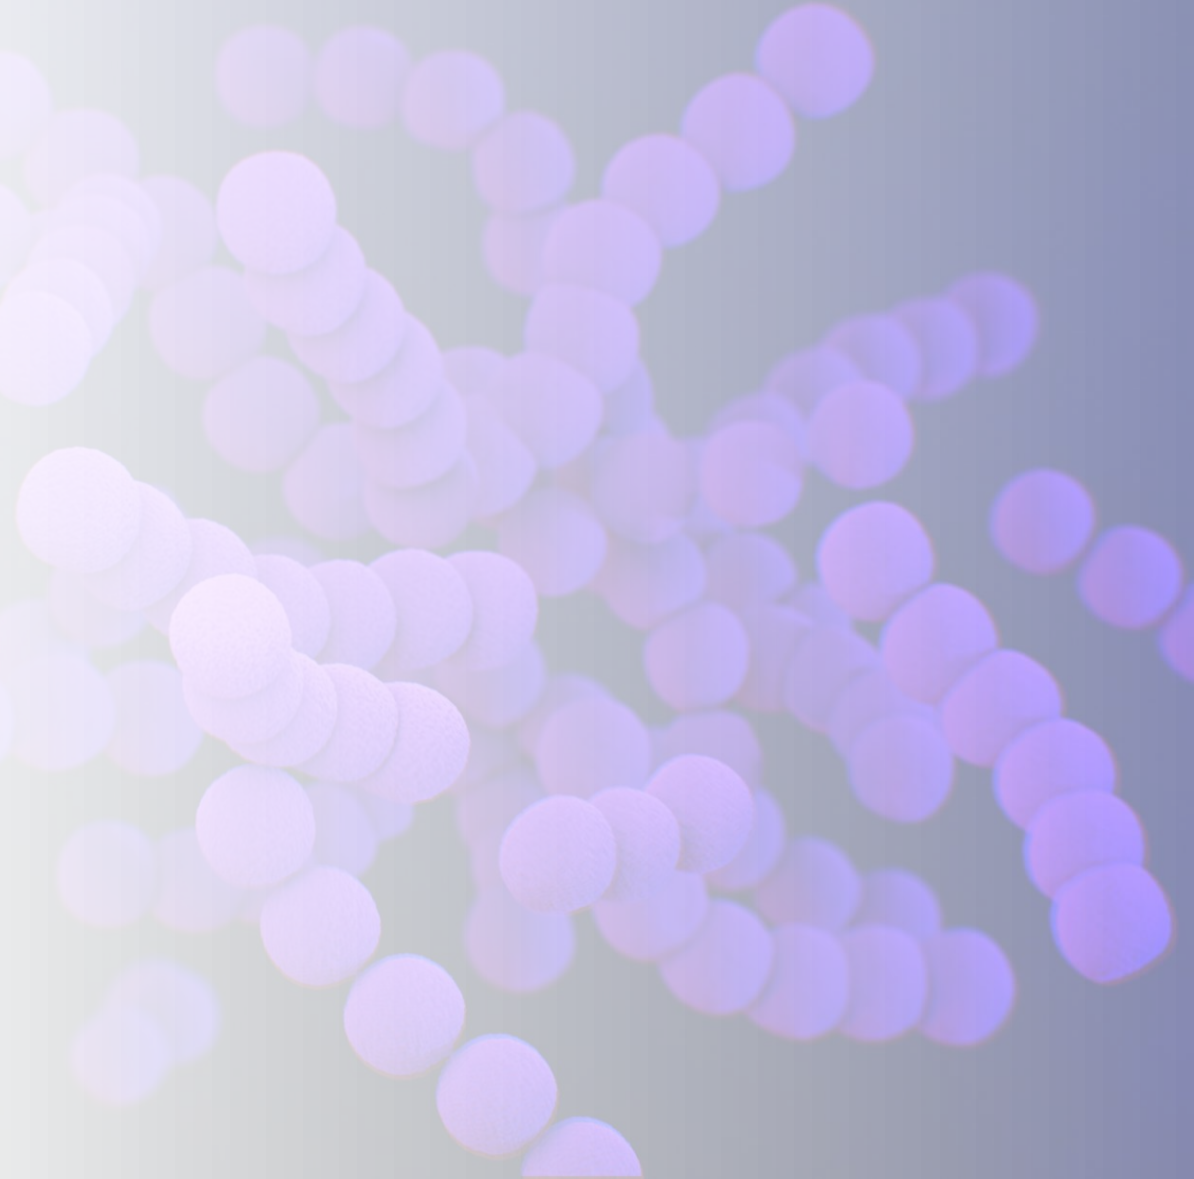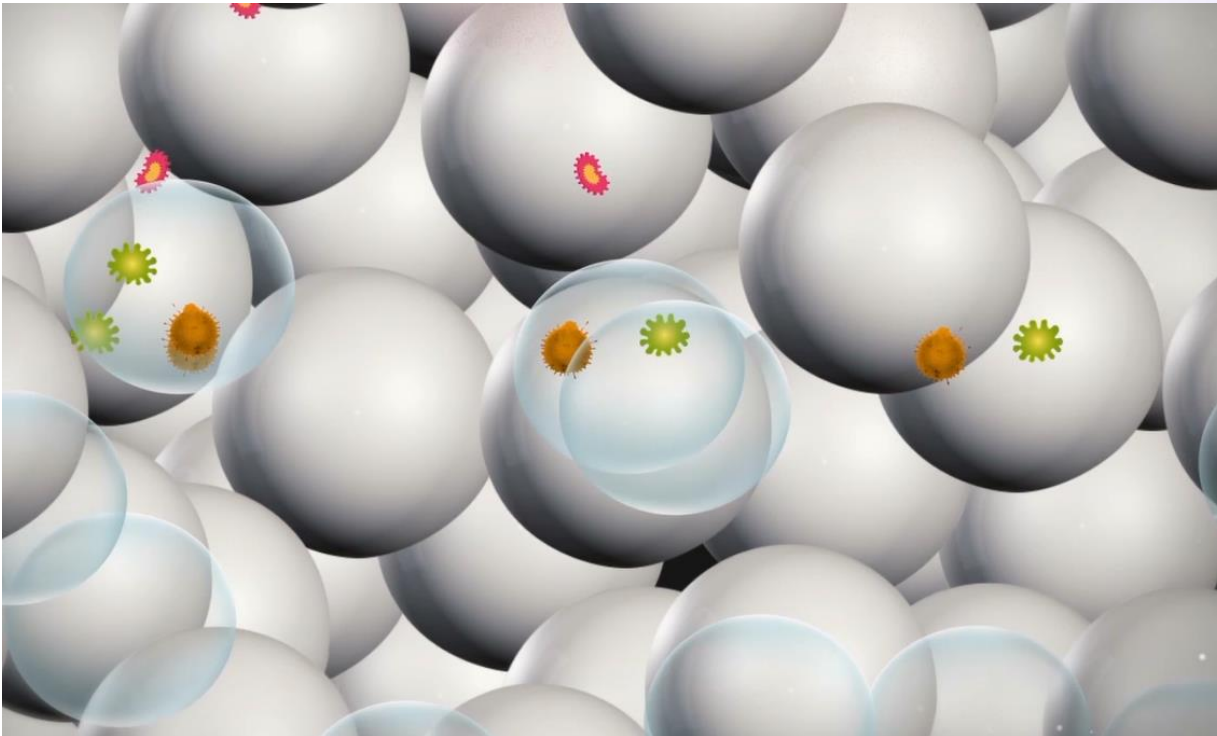

SPASYS BEAUTY FILTER : Jojoba oil moisturizing filter




Jojoba oil moisturizing filter

Jojoba oil is manufactured as capsule type and it supplies to skin at constant rate.


It moisturizes skin, generates moisture layer on the skin, and promotes skin and hair health.

It is well absorbed into skin and good for all type of skin.

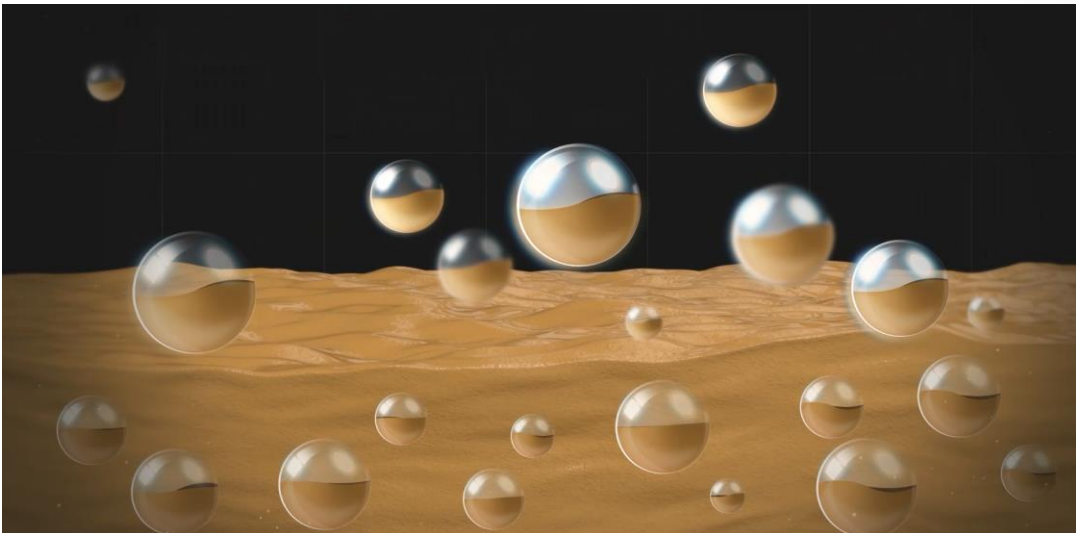

AROMA SENSE SPASYS SHOWER SYSTEM

CIRCULATION OF WATER

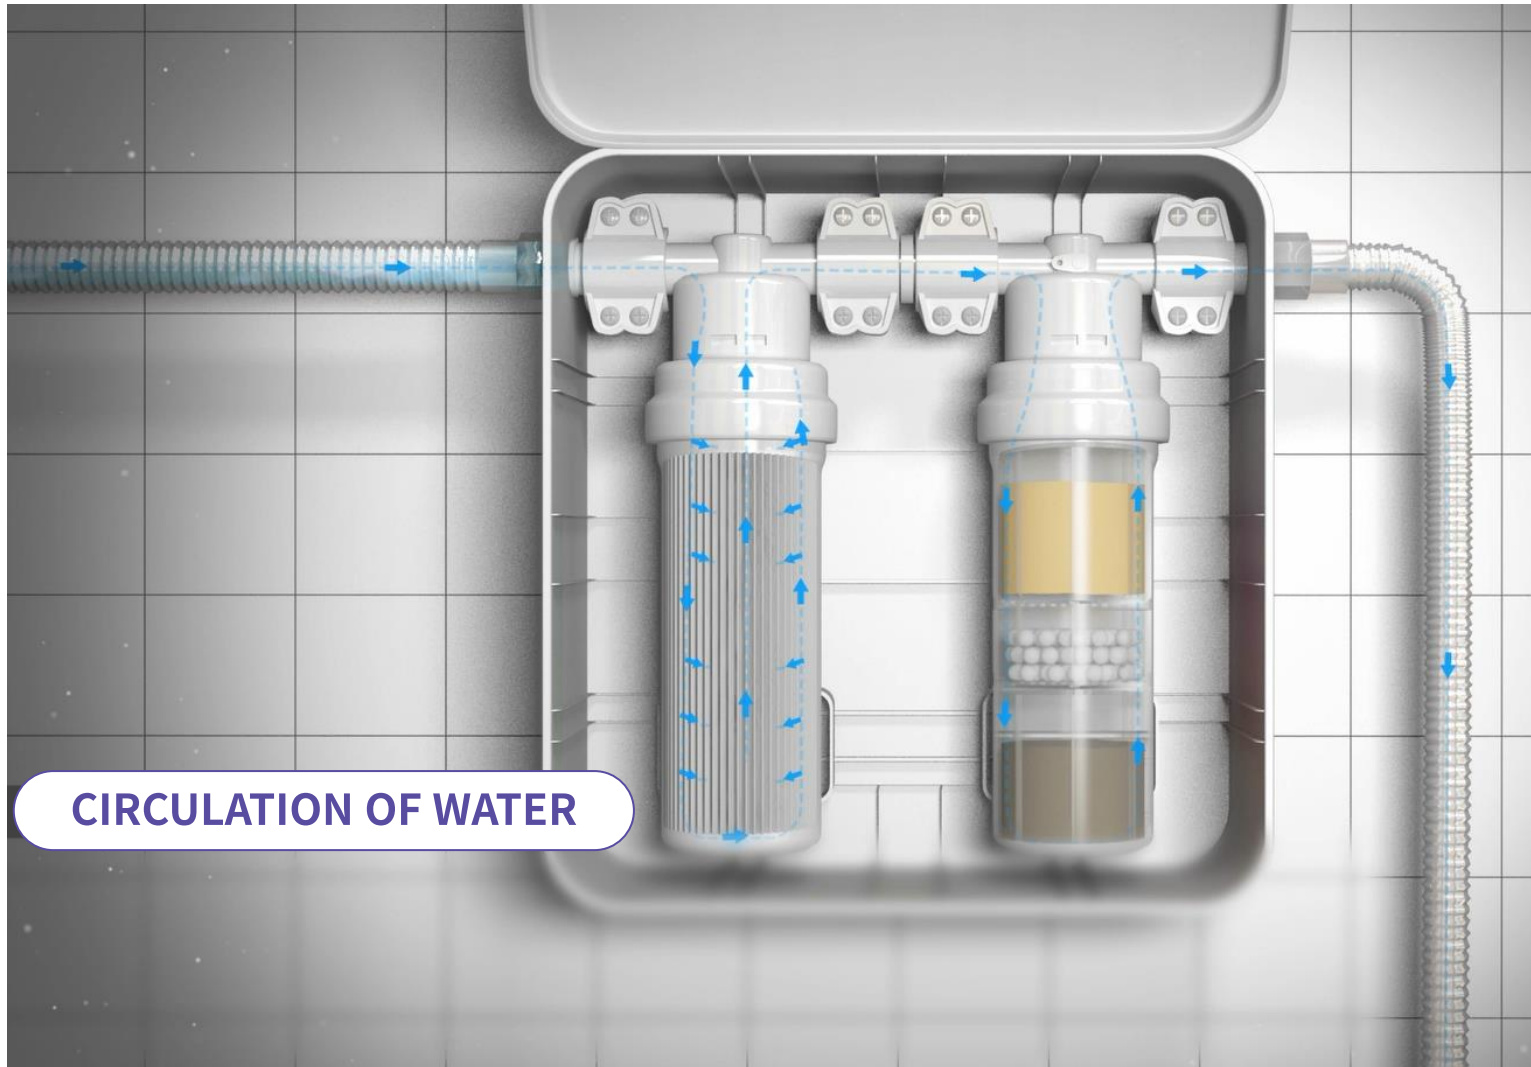

Product components




SPASYS Main Product

- 1 Main unit
- 2 Carbon filter (1st)
- 3 Beauty filter (2nd)
- 4 AS-MIST 1 piece (Without filter)




Parts


- 1 Spanner
- 2 Faucet Hose 0.8m & 1.5m
- 3 Bracket for fixing
- 4 Silicone
- 5 Screw Anchors x 4pcs
- 6 Stands for floor mounting x 2pcs

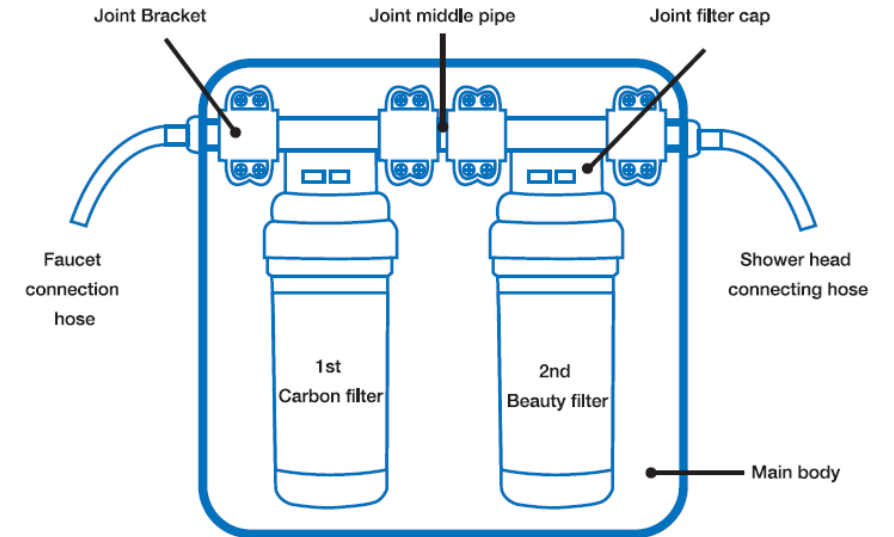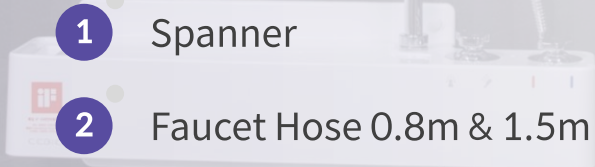

Product connecting parts

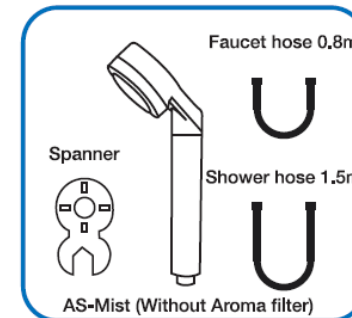

Product fixing parts

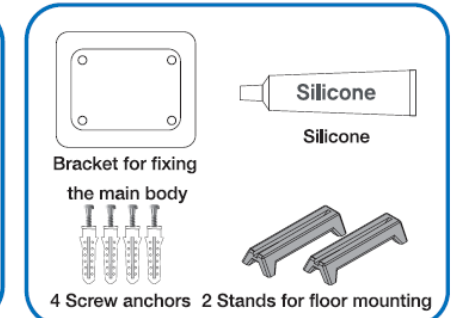


Packaging

Main Product



Product Box

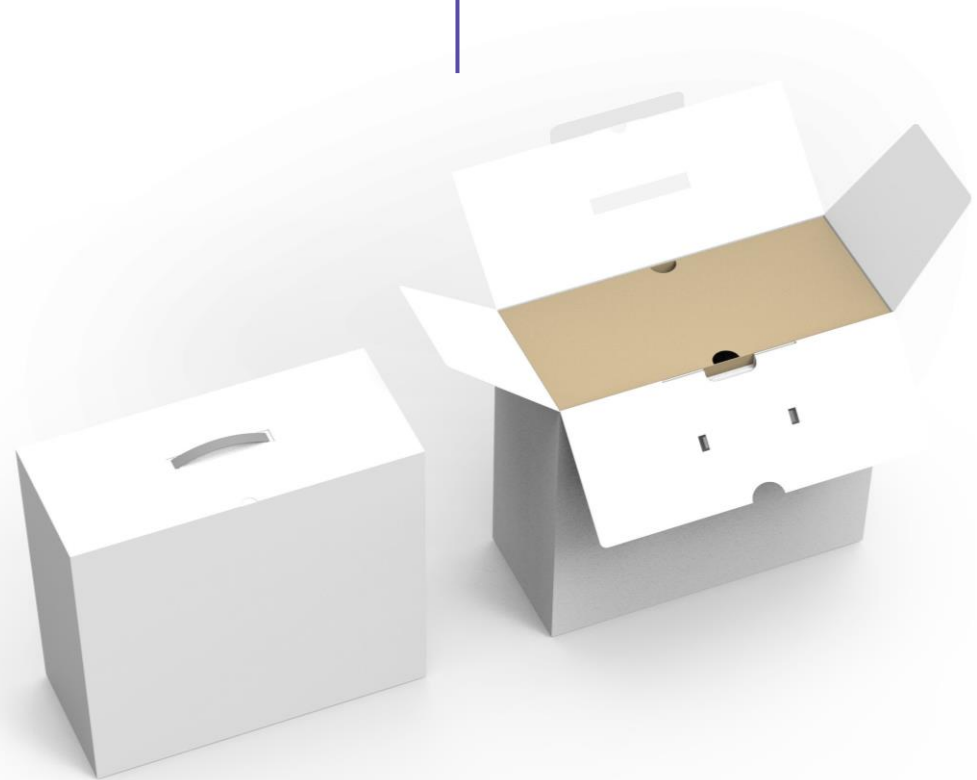

Aroma Sense Shower head

Patent and Test report Holding Status

Test Report

Chlorine Removal



Absorption of Heavy Metal




Skin Sensitive Study




Moisturizing the skin



Moisturizing the skin (with moisture content)



Skin Irritation Study



Patent for shower system

Shower System which have beauty filter as High quality



Manufacturing method of Hydrogel composition for beauty filter which have moisturizing effect



How to Install

01

Positioning (Common for both fix by silicon/screw anchors)

The inlet (left) and outlet (right) hoses must be connected to the SPASYS main body in advance to facilitate optimal positioning.




1

Separate the old shower hose from the faucet



2

Connect the enclosed 80cm hose to the faucet and the SPASYS body inlet (left)

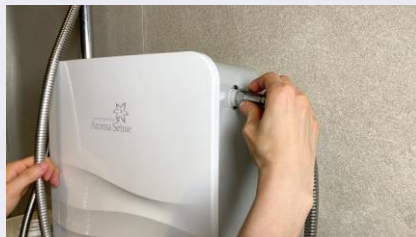


3

Connect the shower hose to the SPASYS body outlet (right)



4

Look against the wall and make sure that the hose is of the correct length and that there are no tangle

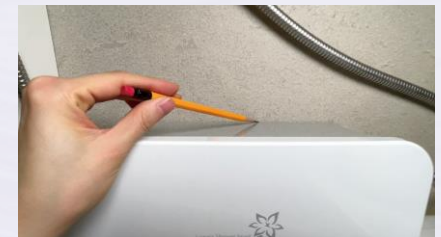

5

Find the best location and mark it with a pencil

How to Install

02

Bracket (How to fix by silicon)



- 1 Remove the vinyl from the double-sided tape by peeling it off



- 2 Fill the edge groove with enough silicon adhesive to apply the entire circumference



- 3 Cleanly remove foreign matter and moisture from the wall before attachment. Align the bracket to the center of the position marked with a pencil, and attach it while pressing it with force.



- 4 **Mount after 24 hours**
Wait for at least a day (24hours) for the silicon adhesive to completely solidify, then insert the SPASYS main body downward from the top.

How to Install

03

Bracket (How to fix screw anchors)



- 1 First, mark where to install the shower system on the wall
- 2 Make a drill hole (5-6mm) so that the screw anchors can be inserted
- 3 After pushing the screw anchors deep into the hole, attach the bracket and tighten the screw
- 4 Installation is completed by inserting the SPASYS main body onto the bracket downward from the top
- 5 Installation can be done regardless of the condition of the tile wall.


※ Installation can be done regardless of the condition of the tile wall, but be careful not to break the tiles

※ When choosing where to fix on the tile wall, it is recommended to install it in consideration of the length of the hose for the water supply (80cm)

How to Install

04

How to install the stand

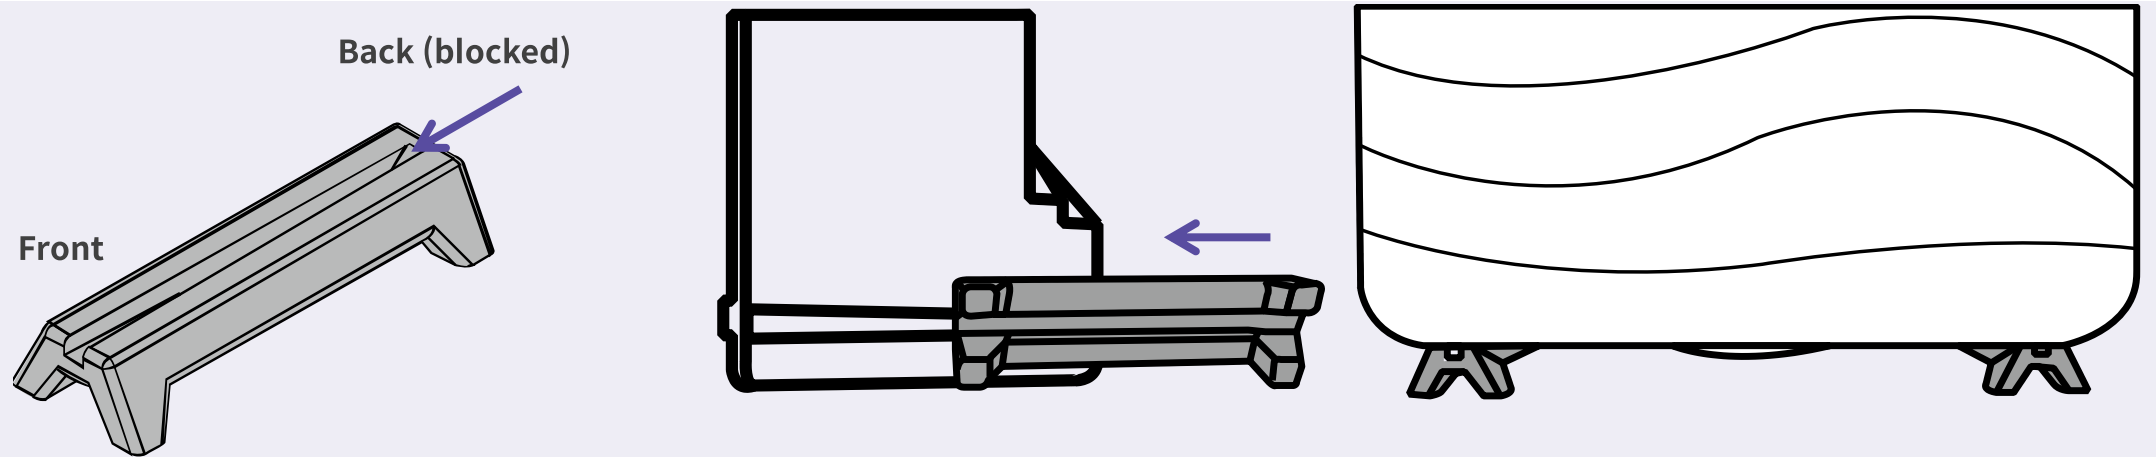


- 1 Install main body fixing stand on both sides of the protrusion at the bottom of the shower system
- 2 The stand can be pushed in from the back of the shower system to the front
- 3 After installation, place it on a flat floor and connect the main body connection hose to install

※ If the shower hose is moved excessively while taking a shower, the main body may fall over

※ If the length of the existing water supply hose and shower hose is short, prepare and install a longer one (Longer hoses are not included)

How to replace the filter

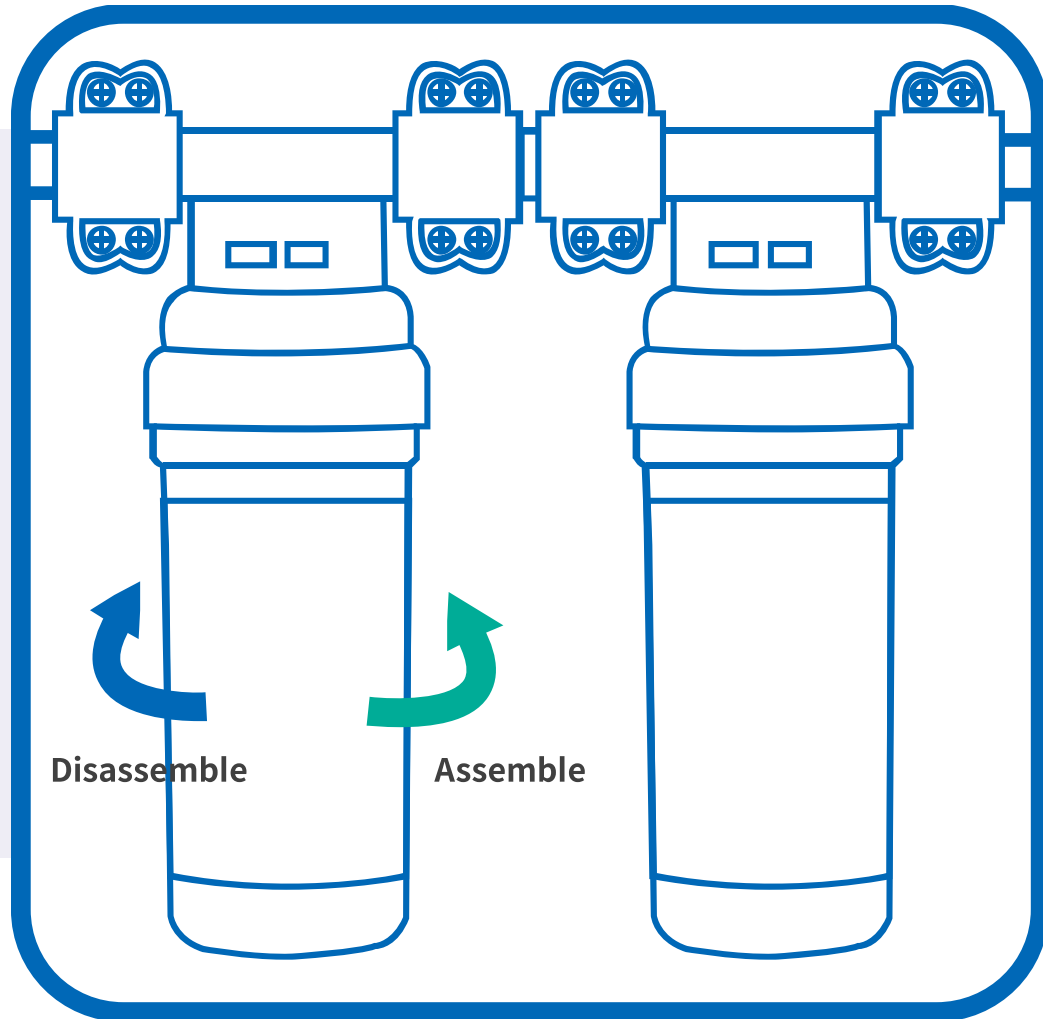

1

Lift the used filter forward and turn it counterclockwise to remove it

2

Fit the new filter into the groove of the socket and push it all the way, then it clockwise to install

Filter life

1st Carbon filter

Filter replacement cycle : about 4-6 months, 20,000 liters



A total water flow of 20,000L and usage time of 2,400 minutes can be used and the usage period may vary depending on the water temperature, water pressure, and the water quality used. It is recommended to replace it with the 2nd beauty filter. If the water quality is not good and the internal water pressure rises excessively, the safety valve at the bottom of the carbon works to lower the water pressure

2nd Beauty filter

Filter replacement cycle : about 4-6 months, 20,000 liters



A total water flow of 20,000L and usage time of 2,400 minutes can be used, and the usage period may vary depending on the water temperature, water pressure, and the water quality used.



Precautions

- Be sure to connect to tap water for use, if industrial water or group water is used, we can not be held responsible for functional problems
- After installation, be sure to check the hose connection for leaks before use
- Do not drink water that has passed through the SPASYS shower system as it is intended for washing and showering
- Individuals with sensitive skin may have an allergic reaction to aroma. If allergic reaction occurs, it is recommended to stop using it or use an aroma-free moisturizing filter instead of a beauty filter
- The ideal recommended water pressure is 2-3 kgf/cm2

※ The recommended replacement cycle for the filter is 4~6 months. Since the life of the filter may vary depending on the operating environment such as the operating time, turbidity of tap water, and water temperature, it is recommended to replace the filter in the following cases.

1st Carbon filter	When the water pressure gradually decreases
2nd Beauty filter	If the aroma is weak or does not smell

- When replacing the filter, if it is not properly installed in the socket, water leakage may occur. When using the 1st carbon filter for the first time, drain water for 2-3 minutes before use
- The sound may be generated when using the filter for the first time after replacing the filter. But it is a normal reaction because it is the sound generated by water entering the filter
- When cleaning the main unit, wipe it with tap water using a soft cloth. Do not use chemicals such as benzene or thinner
- Do not place objects on the main unit. If you put something on it, it may fall off the wall

AROMA SENSE SPASYS SHOWER SYSTEM

Korea New Tech Corp.



Enjoy Aroma Vitamin C
SPA System at home!

